


TAPES AND SEALANTS / ADHESIVES

- 399 TAPES AND SEALANTS/ADHESIVES - STYLUS
- 400 TAPES AND SEALANTS/ADHESIVES - INFORMATION SHEET
- 401 TAPES AND SEALANTS/ADHESIVES - NEOPRENE RUBBER FOAM TAPE
- 402 TAPES AND SEALANTS/ADHESIVES - EPDM RUBBER FOAM TAPE
- 403 TAPES AND SEALANTS/ADHESIVES - PVC NITRILE FOAM TAPE
- 404 TAPES AND SEALANTS/ADHESIVES - POLYETHYLENE FOAM TAPE
- 405 TAPES AND SEALANTS/ADHESIVES - SELF - ADHESIVE EPDM SPONGE EXTRUSIONS
- 407 TAPES AND SEALANTS/ADHESIVES - STORAGE AND INSTALLATION PROCEDURES
- 408 TAPES AND SEALANTS/ADHESIVES - PRODUCT STATEMENT
- 409 TAPES AND SEALANTS/ADHESIVES - SEALANTS - HYBRID POLYMERS + SILICONE
- 410 TAPES AND SEALANTS/ADHESIVES - EXPANDING FOAM
- 410 TAPES AND SEALANTS/ADHESIVES - CONTACT SPRAY
- 410 TAPES AND SEALANTS/ADHESIVES - STRONG AS NAILS
- 411 TAPES AND SEALANTS/ADHESIVES - GAP FILLER
- 411 TAPES AND SEALANTS/ADHESIVES - APPLICATOR GUNS
- 412 TAPES AND SEALANTS/ADHESIVES - LOCTITE

6100 SERIES
SELF ADHESIVE SINGLE
SIDED FOAM TAPE

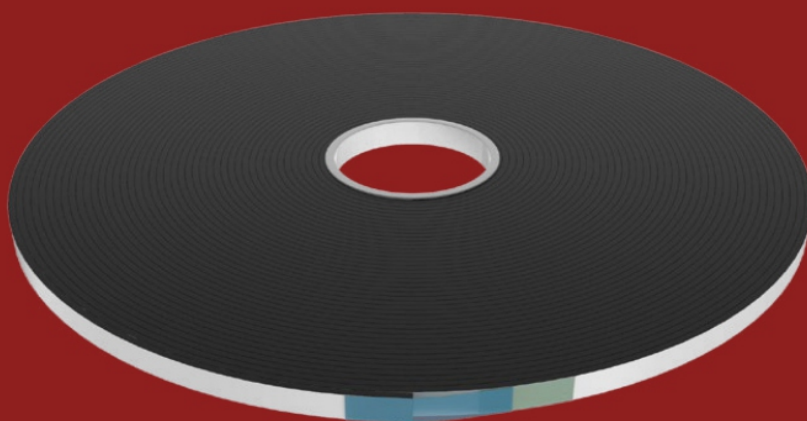

STYLUS
ADHESIVE TAPE SPECIALISTS



REFLECTIVE TAPES



FOAM TAPES



FOIL TAPES



HOOK & LOOPS



DOUBLE SIDED TAPES



SAFETY RANGE



PRINTED TAPES & LABELS

INFORMATION SHEET

McNaughtans is a DISTRIBUTOR of an exceptionally extensive range of Tape Products.

From the standard Self Adhesive Single Sided Foam Tapes in either Neoprene, EPDM, Nitrile or Polyethylene to Double Sided Adhesive Tapes.

These are supplied in specific thicknesses and widths. The Double Sided tapes also have different adhesive strengths that are available for designated applications.

Other areas covered in the Tape range extend to the following products :

Packaging Products	eg	Packaging tapes - General and Compostable (Eco Friendly)
Masking and Paper Tapes	eg	General and Automotive
Gaffer and Cloth	eg	General or Specialised Gaffer or Cloth Tape – Range of Colours
HVAC Range	eg	Duct, Foil and Foam Flange Tapes.
Reflective Tapes	eg	Class 1 – Premium and Class 2 – Engineering quality
Safety Range	eg	Anti-Slip, Floor Marking, Barricade and Glow in the Dark Tapes
Electrical Tapes	eg	Large range of colours
Hook and Loop Range	eg	Self Adhesive Hook and Loop Rolls

The availability of special cut rolls for the single sided tape is on request and subject to minimum order quantities.

This will also have a lead time for production.

A number of product lines will be subject to minimum orders and will mainly be carton quantity buys.

Any SPECIAL ORDERS or Non Stock Items will not be accepted for return or refund.

All products offered can have Technical or Safety Data Sheets supplied via online.

6100 Series

NEOPRENE RUBBER FOAM

DESCRIPTION


This single sided closed cell foam specially formulated to provide resistance against oils, grease, chemicals and weathering.

APPLICATIONS


- ▶ Construction/Fabrication
- ▶ Glass & Glazing
- ▶ Rail networks/Boat building
- ▶ Die cut gasket applications
- ▶ Thermal & Acoustic barriers
- ▶ Insulation for Solar Panel Systems

BENEFITS

- ▶ Resistant to toxic substances like hydrocarbons
- ▶ Seals against oils, chemicals & petrochemicals
- ▶ High temperature performance
- ▶ Environmental Protection: CFC & HCFC Free
- ▶ Flame Resistance (>3mm) Standard: FMVSS302
- ▶ RoHS compliant in respect to 2002/95/EC
- ▶ Thickness(mm): 1.6, 3.2, 4.8, 6.4, 9.5, 12.7 & 19

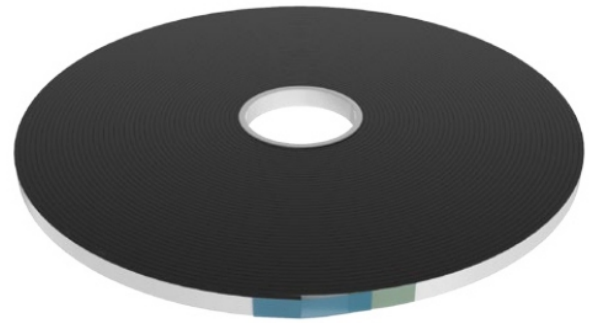

6100 Series

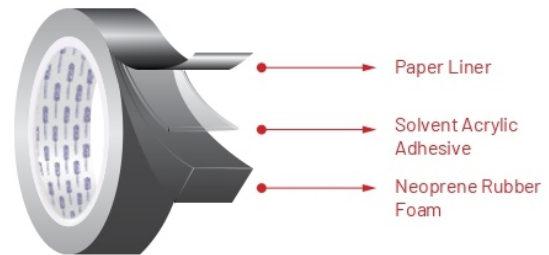

TECHNICAL DATA

• Adhesive power	★★★★★	• Compression set - % (ASTM D1056)	4
• Density - kgs/m ³ (ASTM D3575)	140-190	• Shore Hardness - 00	40-50
• Tensile strength - N/cm ² (ASTM D412)	56	• Adhesive type	Solvent Acrylic
• Elongation - % (ASTM D412)	180-220	• Adhesion to steel - N/25mm	14
• Temperature Resistance - °C	-30 to 130	• Backing material	Closed cell Neoprene

Test methods are shown in brackets

PART NO.	TAPE MEASUREMENT	ROLL LENGTH
6103 - 12	12 x 3mm	25m
6103 - 18	18 x 3mm	25m
6103 - 24	24 x 3mm	25m
6106 - 18	18 x 6mm	15m
6106 - 24	24 x 6mm	15m
6106 - 36	36 x 6mm	15m
6106 - 48	48 x 6mm	15m
6109 - 18	18 x 9mm	10m
6109 - 24	24 x 9mm	10m
6112 - 18	18 x 12mm	7m
6112 - 24	24 x 12mm	7m
6112 - 36	36 x 12mm	7m

The above information is given in good faith for guidance only and not specification purposes. All data is based upon average values, the Purchaser shall be responsible for determining the suitability of this product for their purposes.

6200 Series
EPDM RUBBER FOAM

DESCRIPTION


This single sided closed cell foam is resistant to UV rays, weathering and does not allow ingress of air, dust, moisture or water.

APPLICATIONS


- ▶ Construction/Fabrication
- ▶ Glass & Glazing
- ▶ Rail networks/Boat building
- ▶ Die cut gasket applications
- ▶ Thermal & Acoustic barriers
- ▶ Insulation for Solar Panel Systems

BENEFITS

- ▶ Provides sealing properties against air, dust, water & moisture
- ▶ Ozone, weather & heat resistant attributes
- ▶ High temperature performance
- ▶ Environmental Protection: CFC, Halogen & HCFC Free
- ▶ Flame Resistance (>3mm) Standard: FMVSS302
- ▶ RoHS compliant in respect to 2002/95/EC
- ▶ Thickness (mm): 1.6, 3.2, 4.8, 6.4, 9.5 & 12.7

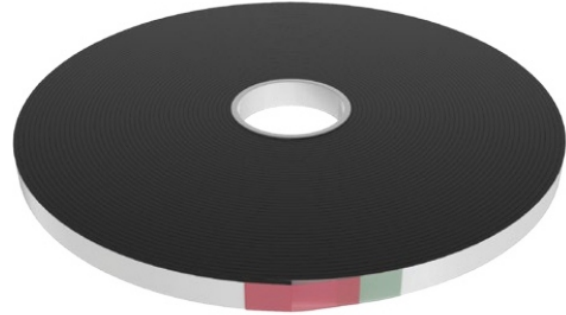

6200 Series

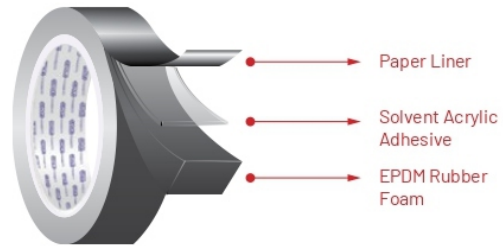

TECHNICAL DATA

• Adhesive power	★★★★★★	• Compression set - % (ASTM D1056)	4
• Density - kgs/m ³ (ASTM D3575)	125-165	• Shore Hardness - 00	40-50
• Tensile strength - N/cm ² (ASTM D412)	60	• Adhesive type	Solvent Acrylic
• Elongation - % (ASTM D412)	180-220	• Adhesion to steel - N/25mm	14
• Temperature Resistance - °C	-30 to 130	• Backing material	Closed cell EPDM

Test methods are shown in brackets

PART NO.	TAPE MEASUREMENT	ROLL LENGTH
6203 - 18	18 x 3mm	25m
6203 - 24	24 x 3mm	25m
6206 - 12	12 x 6mm	15m
6206 - 18	18 x 6mm	15m
6206 - 24	24 x 6mm	15m
6206 - 48	48 x 6mm	15m

The above information is given in good faith for guidance only and not specification purposes. All data is based upon average values, the Purchaser shall be responsible for determining the suitability of this product for their purposes.